

# Ultra Compact Embedded Computer Based on fast Intel Atom

### **General Description**

Goal of the design was an ultra compact, robust and complete fanless Embedded Computer. Based on the low power, embedded, long-term available Intel Atom Z530P processor we designed a system, that works smooth without derating, throttling, fan or case openings between -40°C and +75°C. Integrated are features like up to 4 Gbit Ethernet ports, 7 USB ports and 2 serial ports. As memory DDR2 modules up to 2GB can be used. The unique design that gets along without any wiring allows to use the system in any application, careless how rugged the environment might be. MPL computers are available according your configuration and even with your logo.

### **The CEC7 Capabilities**

Next to the extreme low power consumption is the compactness of the system. The CEC7 has a complete set of standard PC features as well as industrial features like 8-36 VDC input power including a load dump and reverse polarity protection and 2 serial ports (RS232/485). For highest usability all status LEDs and user buttons are available on the front. Further versions with DIN-rail holder or flange mounting are offered for easy installation. Unique features are:

- Rugged ultra compact system without any internal wiring
- Use of Z530P and US15WPT
- extended temperature from -40°C to +75°C
- Up to 2GB DDR2 memory
- SATA IF for DOM and 2.5" disk
- Long-term availability 7+ years


### **These Qualities make**

the CEC7 to the ideal solution for applications where a low power consumption, ultra Compact Embedded Computer is required. The CEC7 can be used in application like transportation systems, telecom and in tough industrial automation applications.



CEC7 dimensions: 62 x 162 x 120 mm (W x H x D)

Compact rugged aluminum housing with stainless steel side plates

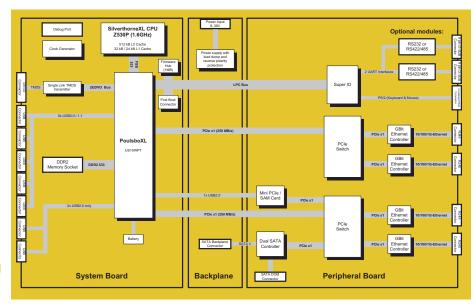



## **Technical Features CEC7**

<b>Board Key Data</b>	a	
Processor	Intel Atom Processor Z530P, 1.6G	CPU from the embedded Intel Roadmap
	64-Bit Data Bus, pipelined floating point unit	Intel Speed Step
Chip Set	PoulsboXL US15WPT	533MHz Frontside Bus
BIOS	1MB Flash EEPROM, easy BIOS update	MPL engineered BIOS (Phoenix), customizable
Memory	Up to 2GB via memory module	200-pin SO-DIMM socket, DDR2-533
Indicators	2 status and up to 9 activity LEDs	Power, Reset, HDD, 4x LAN

Interfaces		
Graphics	INTEL GMA 500 (Integrated Graphics Device)	Digital-Video on DVI-D connector
	200MHz graphic core with 2D and 3D engine	Supports up to 1920x1200 (WUXGA) resolution
Up to 4 x Ethernet	10BaseT /100BaseTX / 1000BaseTX	RJ45 connector, ESD protected, auto negotiation
Up to 7 x USB 2.0	5 ports (USB2.0/1.1) and 2 ports USB2.0 only	Type A connectors, ESD protected, bootable
Up to 2 x Serial Ports	Optionally to RS232 or RS422/485 via modules	9-pin DSUB, ESD protected, max. 230.4 kBaud
2 x SATA Ports	Data transfer rates up to 300Mbyte/s,	Micro SATA receptacle connectors
2 x PS/2	For Keyboard and Mouse	On one 6-pin mini DIN connector, ESD protected
Power/Reset Button	On chassis (protected) and remote button	ATX functionality, ESD protected
PCI-Express Minicard	For WLAN, GPRS, UMTS or similar expansions	With 1x PCIe lane and 1x USB 2.0

<b>Physical / Power</b>		
Chasis	Rugged chromated Aluminum	DIN-rail or flange mounting
	with stainless steel plates	no ventilation holes
Size & Weight	62.1 x 162.1 x 120mm	1.0 kg (without HDD)
Power	8 – 36VDC input power	Power consumption typically 12W
		reverse polarity and load dump protection
Temperature Range	-20°C up to +60°C, optional -40°C up to +75°C	No fan, no openings, values at full CPU load
Humidity	5% - 95% non-condensing	Optional coating available

### **Standard Compliance**

The CEC7 is designed to meet or exceed the most common standards. Particular references are:

The OLOT is designed	to meet of exceed the most common standards. I difficular references are:
EMC	EN 55022, EN 55024, EN 61000, MIL-STD-461E
Shock & Vibration	EN 60068
Environmental/Safety	EN 50155, MIL-STD-810-F, EN 60601, EN 60950
Approval Liete	CF

Approvai	LISTS	CE

CEC7 Versions		
Product number	Function	
CEC7-10	Compact Embedded Computer with Intel Atom Z530P and PoulsboXL US15WPT chipset,	
	Graphics, 2x Gigabit Ethernet, 3x USB2.0, 2x PS/2, 1x SERIF port (all interfaces on bottom side)	
CEC7-11	Compact Embedded Computer with Intel Atom Z530P and PoulsboXL US15WPT chipset,	
	Graphics, 4x Gigabit Ethernet, 7x USB2.0, 2x PS/2, 2x SERIF ports (interfaces on top and bottom side)	
CEC7-Cx	Compact Embedded Computer with Intel Atom Z530P and PoulsboXL US15WPT chipset,	
	customer specific version according your needs	

### **Options**

<ul> <li>DDR2 Memory Modules (extended temperature)</li> </ul>	<ul><li>– Minicard PCI Express Modules (WLAN, GPRS,)</li></ul>
<ul><li>– SATA-DOM (DiskOnModule)</li></ul>	<ul> <li>XTEST-2 (Extended temperature test40°C up to +75°C)</li> </ul>

- SATA 2.5" Disks (SSD or HDD) - Coated versions

### **Operating Systems**

CEC7 systems are 100% PC/AT compatible, therefore any PC operating system (Windows, LINUX,..) can be used.

MPL AG is an ISO9001 certified company

